

Legacy Series 25 Universal Temperature/Process Controller




- ▲ User-Selectable Ramp to Setpoint
- ▲ Bumpless Auto/Manual Transfer
- ▲ NEMA 4X (IP65) Dust and Splash-Proof Front Panel
- ▲ On/Off through Full PID Operation (P,PI,PD,PID)
- ▲ Auto-Tuning, Heat or Cool
- ▲ Adjustable Hysteresis & Heat/Cool Spread
- ▲ Field-Configurable Process, Deviation, or Latching Alarms
- ▲ Remote Setpoint Select Option
- ▲ Dual Output/Dual Alarm Capabilities
- ▲ Optional Process Variable Retransmission
- ▲ cUL and CE Approvals

The Athena Legacy 25 is a 1/4 DIN panel mounted, auto-tuning controller that can be used for precise control of a single loop with two independent outputs. The controller accepts thermocouple, RTD, voltage, or current input. RS-232 or RS-485 communications are available, and two digital LED displays provide visual indication of various controller functions.



Ordering Information

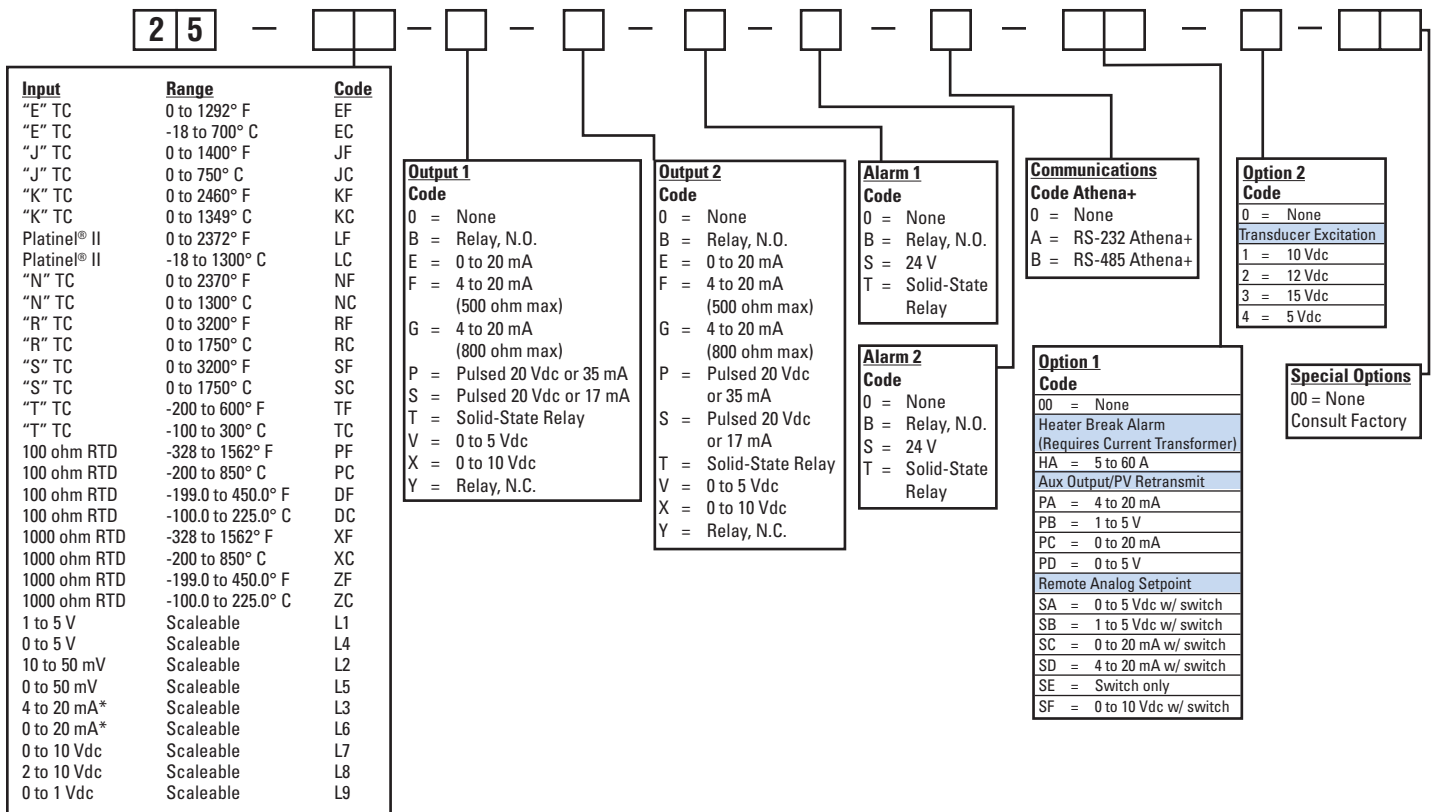

Technical Specifications

Operating Limits

Ambient Temperature	32°F to 131°F (0°C to 55°C)
Relative Humidity Tolerance	90% non-condensing
Line Voltage	100 to 250 Vac 125 to 300 Vdc 24 Vac/dc optional
Power Consumption	Less than 6 VA (instrument)

Performance

Accuracy	±0.20 % of full scale, (± 0.10% typical), ± 1 digit
Setpoint Resolution	1 count/0.1 count
Repeatability Temperature	±1.0 count
Stability	5 mV/°C (maximum)
TC Cold	
End Tracking	0.05°C/°C ambient
Noise Rejection	100 dB common mode 70 dB series mode
Process Sampling	10 Hz (100 ms)
Digital Filtering	Adjustable 0.1 to 10

Control Characteristics

Setpoint Limits	Span of Sensor
Alarms	Adjustable for high/low, selectable process or deviation
Rate	0 to 900 sec
Reset	0 to 2400 sec
Cycle Time	0 = 200 ms; 1 to 120 sec
Gain	0 to 400
Gain Ratio	0 to 2.0 (in 0.1 increments)
Control Hysteresis	1 to 100 (on/off configuration)
Spread (Output 2)	0 to 100 (above setpoint)
Ramp to Setpoint	1 to 100 min
Auto-Tune	Operator initiated from front panel
Manual Control	Operator initiated from front panel

Inputs

Thermocouple	B, C, E, J, K, N, NNM, R, S, T, Platine I II Maximum lead resistance, 100 ohms for rated accuracy
RTD	Platinum 2- and 3-wire, 100 ohms at 0°C, (DIN curve standard 0.00385)
Linear	0-50 mV/10-50 mV, 0-20 mA/4-20 mA, 0-10 mV/0-50 mV, 0-100 mV, 0-1 V/0-5 V, 0-10 V, 1-5 V

Output Options

Output #1 Reverse Acting (heating)	
Output #2 Direct Acting (cooling)	
B	5 A / 3 A (120/240 Vac), normally open
E	0 - 20 mA
F	4-20 mA, full output to load 500 ohm impedance max.

Outputs

G	4-20 mA, full output to load 800 ohm impedance max.
P	20 Vdc or 35 mA
S	20 Vdc or 17 mA
T	1 A , Solid-state relay
V	0 to 5 Vdc
X	0 to 10 Vdc
Y	1 A , normally closed relay

Alarm Outputs

B	5 A / 3 A (120/240 Vac), mechanical relay
S	24 V, 20 mA
T	SSR, NC, 24-240 Vac

Mechanical Characteristics

Display	Dual, 4-digit 0.36" (9.2 mm) LED Display Process Value: Orange Setpoint Value: Green
Numeric Range	-1999 to 9999
Front Panel Rating	NEMA 4X, (IP65)
Front Panel Cutout	3.622" x 3.622" (92 mm x 92 mm)
Connections	Screw Terminals

Specifications subject to change without notice.

