




Pad Mount Thermocouple

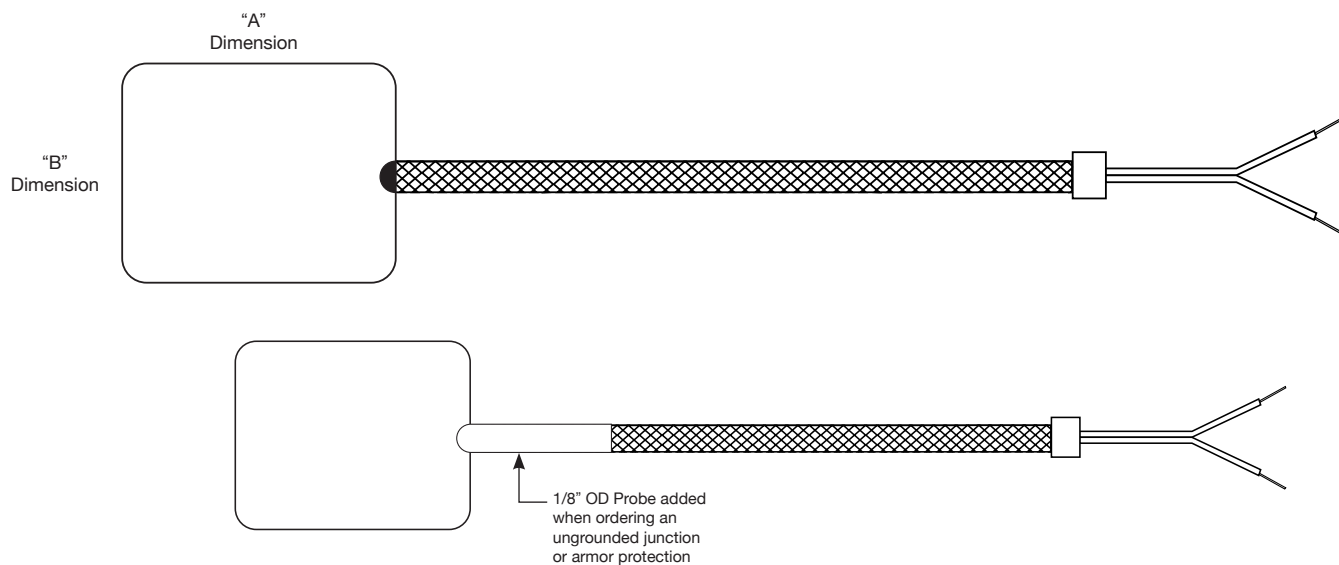

The pad mount sensor is another method of measuring surface temperature. The low profile allows this pad to be placed between components for sensing temperature. The pads can be made using rigid or flexible material. Be sure to specify special pad dimensions if required.

EX: PMJS23GB72F1

Pad Mount, Type "J", Stainless Steel Pad Material, 3/4" x 3/4" Pad Dimensions, Grounded Brazed, 72" Fiberglass Leads, Spade Lugs.

PM											
1	2	3	4	5	6	7	8	9	10	11	

Ground wire available. Add "GW" at end of part number.

1. Style PM

2. Calibration
T
J
E
K

3. Pad Material
S = Stainless Steel
B = Brass
C = Copper

4. Pad Dimensions
0 = Special Dimensions - State
0F = Special Dimensions/Formed Pad
1 = 1/2" x 1/2"
2 = 3/4" x 3/4"
3 = 1" x 1"
4 = 1/2" x 1 1/2"

5. Pad Thickness in fraction
1 = .010
2 = .018
3 = .020
4 = .024

6. Tip & Junction
GB = Grounded Brazed
UB = Ungrounded Brazed

7. Lead Length
in inches

8. Lead Wire Insulation
F = Fiberglass
T = Teflon
K = Kapton

9. Lead Protection
B = Braid
A = Armor
FS = Fiberglass Slewing
SS = Silicone Slewing

10. Termination
0 = Split & Stripped
1 = Spade Lugs
2 = Spade Lugs/BX connector
3 = Standard Plug
4 = Standard Jack
5 = Mini Plug
6 = Mini Jack
7 = Wire Ferrule
8 = Female Push On

11. Sleeve Options Over Lead Protection
FS = Fiberglass Sleeve
SS = Silicone Sleeve
TS = Teflon Shrink
P = PVC Shrink